

SANUPS

PV INVERTER

P83C



SANYO DENKI

High Efficiency PV INVERTER

SANUPS P83C (Grid-connected Type)

PV INVERTER



Input operating voltage range	Output voltage	Rated output	Output electrical system	Standard
DC440V to 840V	AC400V	100kW	3-phase 4-wire system	CE
DC340V to 700V	AC380V	100kW	3-phase 4-wire system	PV Inverter General Test in Korea

POINT 1 High Efficiency

Achieves a high efficiency of 97.8%.*



POINT 2 Space Saving

Required installation space is only 0.68m².



POINT 3 No component replacement necessary for 10 years

Long-life components relieve you of the bother of maintenance


for **10 years**

*Model : P83C104RH

Specifications


Item	Model	P83C104RH	P83C104RL	Remarks
		High voltage type	Low voltage type	
Rated output		100kW		
System	Main circuit type	Self commutation voltage type		
	Switching method	High frequency PWM		
	Electrical insulation method	Commercial frequency insulation transformer method		
DC Input	Maximum allowable input voltage	DC900V	DC750V	
	Input operating voltage range	DC440V to 840V	DC340V to 700V	
	Range of rated output voltage	DC450V to 840V	DC350V to 700V	
	Maximum power point tracking range	DC440V to 840V	DC340V to 700V	
AC Output	Output electrical system	3-phase 4-wire system		Neutral grounding
	Rated output Voltage	AC400V	AC380V	Line
	Rated output current	AC144A	AC152A	
	Rated frequency	50/60Hz		
	AC output current distortion factor	3%max.		Rated output current ratio
Conversion Efficiency	Output power factor	0.99min.		At rated output
	MAX Efficiency	97.8%	97.3%	
	EU Efficiency	96.7%	96.1%	
Grid connected protective function		Utility grid over voltage (OVR), Utility grid under voltage (UVR), Utility grid over frequency (OFR), Utility grid under frequency (UFR)		
Islanding operation detecting functions	Passive-type device	Voltage phase jump detection		
	Active-type device	Reactive power variation method		
External communications		RS485		
Environment	Installation place	Indoor		
	Ambient temperature	-20 to 50°C		When ambient temperatures are above +40°C, the output power is limited
	Relative humidity	15~90%		Non-condensing
	Altitude	2000m or less		
	Protection code	IP20		Option:IP21
Standard	Safety	EN 50178, IEC 62109-1, IEC 62109-2	—	
	EMC	EN 61000-6-2, EN 61000-6-4, EN 55011	—	
	Other	DIN VDE 0126-1-1	—	
	CE marking	Yes	—	
	PV Inverter General Test in Korea	—	Yes	
Other		Volume control		

Dimensions (mm)

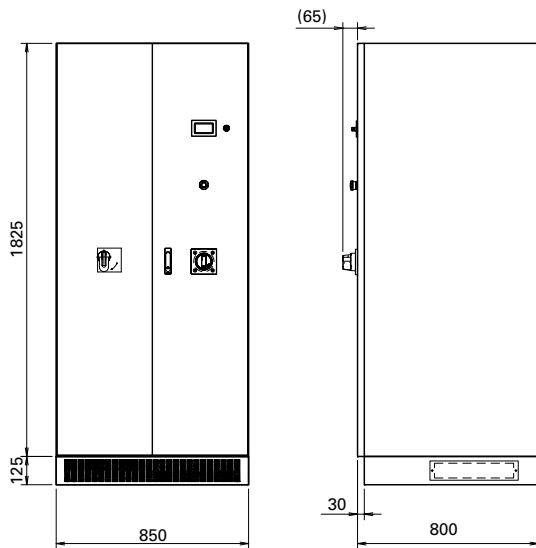

Mass : 920kg

Circuit block diagram

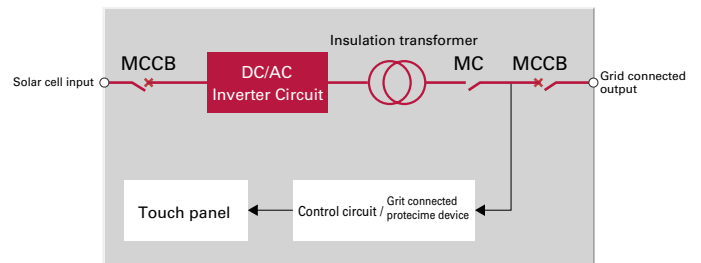

Options

- Junction devices
- Weather signal conversion box
- Outdoor enclosure



■ ECO PRODUCTS

ECO PRODUCTS

Sanyo Denki's ECO PRODUCTS are designed with the concept of lessening impact on the environment in the process from product development to waste. The product units and packaging materials are designed for reduced environmental impact. We have established our own assessment criteria on the environmental impacts applicable to all processes, ranging from design to manufacture. Those products that satisfy the criteria are accredited as ECO PRODUCTS.

Notes when investigating use of this product in your applications

- Before starting installation, assembling and use, read the "Operation Manual" carefully and use the product correctly in your applications.
 - The product or system on this catalog is for general and industrial use. This product or system is not supposed to be applied to where exceptionally high quality and reliability is required, and its failure or improper operation may possibly result in fatal or serious injury. In this case, please call us for further assistance.
 - For the applications that undergo vibration, please consult with our company.
 - Never modify this product or give additional processing to this product.
 - For the installation and maintenance work, please consult with our company or with specialized company.
 - We shall not be responsible for any incidental damages, including but not limited to, losses of inability to equipment, decreased power sales revenue, business interruptions, or increased power purchases, resulting from the use or the inability to use the product or the services.
- ※ For any inquiry or consultation, please contact our sales representative.

<http://www.sanyodenki.com>

SANYO DENKI CO., LTD.

3-33-1, Minami-Otsuka, Toshima-ku, Tokyo, 170-8451, Japan

TEL: +81 3 5927 1020

SANYO DENKI EUROPE SA.

P.A. Paris Nord II, 48 Allée des Erables-VILLEPINTE, BP.57286, F-95958 ROISSY CDG Cedex, France

TEL: +33 1 48 63 26 61

SANYO DENKI AMERICA, INC.

468 Amapola Avenue Torrance, CA 90501, U.S.A.

TEL: +1 310 783 5400

SANYO DENKI SHANGHAI CO., LTD.

Room 2106-2109, Bldg A, Far East International Plaza, No.319, Xianxia Road, Shanghai, 200051, China

TEL: +86 21 6235 1107

Beijing Branch

Room1222, Tower B, Beijing COFCO Plaza, No.8 Jianguomennei Dajie, Dong Cheng District, Beijing 100005 China

TEL: +86 10 6522 2160

SANYO DENKI (H.K.) CO., LIMITED

Room 2305, 23/F, South Tower, Concordia Plaza, 1 Science Museum Road, TST East, Kowloon, Hong Kong

TEL: +852 2312 6250

Tianjin Representative Office

Room AB 16th Floor TEDA Building, No. 256 Jie Fang Nan Road, Hexi District, Tianjin 300042 China

TEL: +86 22 2320 1186

Chengdu Representative Office

Room2105B, Block A, Times Plaza, 2 Zongfu Road, Jinjiang District, Chengdu, 610016 China

TEL: +86 28 8661 6901

SANYO DENKI TAIWAN CO., LTD.

N-711, 7F, Chia Hsin 2nd Bldg., No.96, Sec.2, Zhongshan N. Rd., Taipei 10449, Taiwan (R.O.C.)

TEL: +886 2 2511 3938

SANYO DENKI SINGAPORE PTE. LTD.

988 Toa Payoh North, #04-05/06/07/08, Singapore 319002

TEL: +65 6223 1071

Indonesia Representative Office

Summitmas II 4th Floor, Jl. Jend. Sudirman Kav.61-62, Jakarta 12190, Indonesia

TEL: + 62 21 252 3202

SANYO DENKI GERMANY GmbH

Frankfurter Strasse 92, 65760 Eschborn, Germany

TEL: +49 6196 76113 0

SANYO DENKI KOREA CO., LTD.

9F, Sunhwa B/D 89, Seosomun-ro, Jung-gu, Seoul, 100-731, Korea

TEL: +82 2 773 5623

Busan Branch

8F, CJ Korea Express Bldg., 119, Daegyo-ro, Jung-gu, Busan, 600-016, Korea

TEL: +82 51 796 5151

SANYO DENKI (Shenzhen) CO., LTD.

2F 02-11, Shenzhen International Chamber of Commerce Tower, No.168 Fuhua 3 Road, Futian District, Shenzhen, 518048 China

TEL: +86 755 3337 3868

SANYO DENKI (THAILAND) CO., LTD.

388 Exchange Tower, 25th Floor, Unit 2501-1, Sukhumvit Road, Klongtoey, Klongtoey, Bangkok 10110 Thailand

TEL: +66 2261 8670

The names of companies and/or their products specified in this catalog are the trade names, and/or trademarks and/or registered trademarks of such respective companies. Specifications are subject to change without notice.

CATALOG No.P0897B006 '15.5