# 36×36×28 mm

# SGI ACE 36 ON 301 2P3K001 ON 301 2P3K001

# San Ace 36 9HV type 🛕 🖫 us

#### General Specifications

· Material ...... Frame: Plastic (Flammability: UL 94V-0), Impeller: Plastic (Flammability: UL 94V-1)

Expected life at 40°C is for reference only.

· Motor protection function ...... Locked rotor burnout protection, Reverse polarity protection

For details, please refer to p. 599.

· Dielectric strength ...... 50/60 Hz, 500 VAC, for 1 minute (between lead wire conductors and frame)

 $\cdot$  Sound pressure level (SPL)  $\ \ldots \ldots \$  At 1 m away from the air inlet

· Storage temperature ...... -30 to +70°C (Non-condensing)

· Lead wire ...... 

•Red 
•Black 

Sensor 

Yellow 

Control 

Brown

· Mass ...... 53 g

### Specifications

The models listed below have ribs and pulse sensors with PWM control function.

	Model no.	Rated voltage	Operating voltage range	PWM duty	Rated current	Rated input	Rated speed	Max. a	irflow	Max. static pressure		SPL	Operating temperature	Expected life
		[V]	[V]	cycle* [%]	[A]	[W]	[min <sup>-1</sup> ]	[m³/min]	[CFM]	[Pa]	[inchH <sub>2</sub> 0]	[dB (A)]	[°C]	[h]
Ð	9HV3612P3K001	12	10.8 to 13.2	100	1.75	21.0	32500	0.72	25.4	1400	5.62	67	-20 to +60	30000/60°C
				20	0.05	0.6	6000	0.12	4.2	47.2	0.19	26		(53000/40°C)


<sup>\*</sup> PWM input frequency is 25 kHz; models without specifications at 0% PWM duty cycle have zero fan speed at 0%.

Note: The Note: The mark indicates Short Lead Time Service applicable models. See p. 654 for details.


#### Airflow - Static Pressure Characteristics / PWM Duty - Speed Characteristics Example

## 9HV3612P3K001 With pulse sensor with PWM control function


#### PWM duty cycle




#### Operating voltage range




#### PWM duty - Speed characteristics example



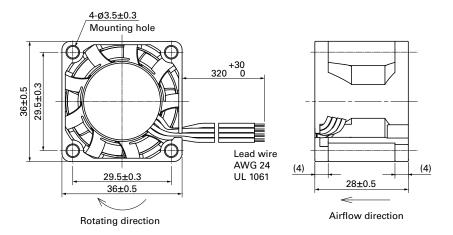

# Reference Dimensions of Mounting Holes and Vent Opening (unit: mm)

Inlet side, Outlet side



# Options

Finger guards

page: p. 584

Model no.: 109-1050